


Berridge Aluminum Stocking Program

KYNAR 500® OR HYLAR 5000® PVDF RESIN-BASED COLOR FINISHES

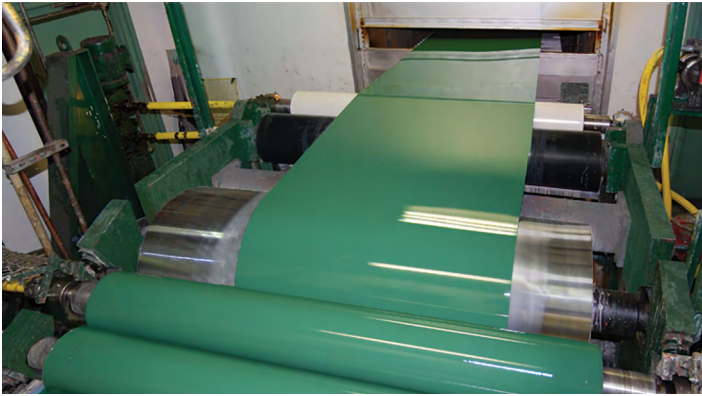

PRODUCT DESCRIPTION

Basic Use: Berridge prefinished architectural aluminum coil and flat sheets are for applications such as metal roofing, siding, fascia, soffit, gutters, gravel stops, copings, store front components, and other general sheet metal use.

Standard Sizes: 0.032" (0.8 mm) and 0.040" (1 mm)

Standard Width: 42" and 48" - Type 3105 H14

Colors: Berridge stocks aluminum in 48" master coils in several of our popular colors. All other colors are subject to inventory on hand or a 4,500 square foot minimum order. Consult BMC for colors and availability. Custom colors are available in minimum quantities of 5,000 square feet.

SPECIFICATIONS

See the reverse side for aluminum specifications.

INSTALLATION

Fabricate and install Berridge aluminum sheets in accordance with standard SMACNA sheet metal practices. Fasteners and other component parts should have equivalent corrosion resistance. Visit www.Berridge.com for approved sealants and detailed.

WARRANTY

Berridge offers a 20-year finish warranty for the Kynar 500® or Hylar 5000® PVDF resin-based coatings which it applies on its continuous coil coating line. Visit www.Berridge.com for more information about how to apply.

AVAILABILITY & COST

Berridge products are available through our nationwide network of Licensees or factory direct for qualified sheet metal installers. Call (210) 650-3050 for the name and number of your nearest Berridge Licensee or your local Sales Representative.

MAINTENANCE

Properly installed Berridge prefinished architectural aluminum coil & flat sheets require little to no maintenance.

STORAGE

Prior to installation, stored coils, flat sheets, or fabricated products should be protected from moisture and/or condensation. Keep material off the ground and in an inclined position.

TECHNICAL SERVICES

For technical or architectural consulting, call (210) 650-3050.

| Product | Painted Aluminum | |
|-------------------------------------|------------------|-------|
| | 0.032 | 0.040 |
| Coil | ▪ | ▪ |
| Flat Sheet | ▪ | ▪ |
| Trim | ▪ | ▪ |
| B-6 Panel | | |
| Batten Seam Panel | | |
| Bermuda Roof Panel | | |
| Cee-Lock Panel - 16 1/2" (Standard) | ▪ | |
| Cee-Lock Panel - 11 1/2" (Optional) | L | |
| Classic Shingle | | |
| Curved Flat Seam Panel | | |
| Deep-Deck Panel | ▪ | ▪ |
| Double-Rib Panel | | |
| Fish Scale Shingle | | |
| Flush Seam Panel | | |
| Fluted Fascia | | |
| FW-1025 | ▪ | ▪ |
| FW-12 | ▪ | ▪ |
| HR-16 Wall Panel | ▪ | |
| HS-8 Panel | ▪ | |
| HS-12 Panel | ▪ | |
| L-Panel | ▪ | |
| "M" Panel | ▪ | |
| "R" Panel | ▪ | |
| S-Deck Panel | ▪ | ▪ |
| Curved S-Deck Panel | ▪ | ▪ |
| S-Tile | | |
| Spanish Tile | | |
| Tee-Panel | L | |
| Curved Tee-Panel | L | |
| High Seam Tee-Panel | ▪ | |
| Curved High Seam Tee-Panel | ▪ | |
| Tee-Lock | ▪ | ▪ |
| Thin Line | | |
| Vee-Panel | | |
| Victorian Shingle | | |
| Zee-Lock (Single Lock) | ▪ | ▪ |
| Curved Zee-Lock (Single Lock) | | |
| Double-Lock Zee-Lock | ▪ | ▪ |

L - Limited Availability

BERRIDGE STOCK AVAILABILITY AND COLOR DETAILS

S - Stock Color N - Non-Stocking Color N/A - Not Available

| Standard Colors | 0.032 Aluminum* | | 0.040 Aluminum* | | SR | EM | SRI |
|---------------------------|-----------------|-----|-----------------|-----|------|------|-----|
| | 48" | 42" | 48" | 42" | | | |
| Aged Bronze | S | N | S | N/A | 0.30 | 0.86 | 30 |
| Almond | S | N | S | N/A | 0.65 | 0.83 | 77 |
| Bristol Blue | N | N | N | N/A | 0.33 | 0.85 | 33 |
| Buckskin | N | N | N | N/A | 0.32 | 0.83 | 32 |
| Burgundy | N | N | N | N/A | 0.29 | 0.85 | 29 |
| Charcoal Grey | N | N | N | N/A | 0.29 | 0.84 | 28 |
| Cityscape | N | N | N | N/A | 0.48 | 0.87 | 54 |
| Colonial Red | N | N | N | N/A | 0.33 | 0.85 | 34 |
| Copper Brown | N | N | N | N/A | 0.30 | 0.85 | 29 |
| Dark Bronze | S | N | S | N/A | 0.28 | 0.85 | 27 |
| Deep Red | N | N | N | N/A | 0.39 | 0.84 | 41 |
| Evergreen | N | N | N | N/A | 0.30 | 0.85 | 30 |
| Forest Green | N | N | N | N/A | 0.25 | 0.83 | 22 |
| Hartford Green | N | N | N | N/A | 0.28 | 0.83 | 26 |
| Hemlock Green | N | N | N | N/A | 0.31 | 0.83 | 30 |
| Matte Black | N | N | N | N/A | 0.26 | 0.89 | 26 |
| Medium Bronze | S | N | S | N/A | 0.31 | 0.85 | 31 |
| Parchment | S | N | S | N/A | 0.52 | 0.83 | 58 |
| Patina Green | N | N | N | N/A | 0.34 | 0.86 | 36 |
| Royal Blue | N | N | N | N/A | 0.26 | 0.85 | 25 |
| Shasta White | S | N | S | N/A | 0.60 | 0.84 | 70 |
| Sierra Tan | S | N | S | N/A | 0.39 | 0.85 | 42 |
| Teal Green | N | N | N | N/A | 0.27 | 0.87 | 27 |
| Terra - Cotta | N | N | N | N/A | 0.32 | 0.83 | 31 |
| Zinc Grey | S | N | S | N/A | 0.39 | 0.85 | 42 |
| Acrylic-Coated Galvalume® | N/A | N/A | N/A | N/A | 0.67 | 0.20 | 59 |
| Premium Colors* | | | | | | | |
| Award Blue | N | N | N | N/A | 0.17 | 0.83 | 11 |
| Natural White | N | N | N | N/A | 0.76 | 0.84 | 93 |
| Metallic Colors* | | | | | | | |
| Antique Copper-Cote | N | N | N | N/A | 0.33 | 0.84 | 34 |
| Champagne | N | N | N | N/A | 0.40 | 0.85 | 43 |
| Copper-Cote™ | N | N | N | N/A | 0.51 | 0.85 | 59 |
| Lead-Cote™ | N | N | N | N/A | 0.46 | 0.84 | 50 |
| Prewathered Galvalume® | N | N | N | N/A | 0.40 | 0.85 | 43 |
| Zinc-Cote™ | N | N | N | N/A | 0.52 | 0.83 | 59 |

Testing results for Kynar 500® or Hylar 5000® coil coating applications:

Specular Gloss: (ASTM D-523) Low and medium gloss only
 Color Uniformity: (ASTM D-2244) Color controlled both instrumentally and visually
 Dry Film Thickness: (ASTM D-7091, ASTM D-1005, NCCA 11-13, 11-14, 11-15) Primer 0.20 ± 0.05 mil, Topcoat 0.75 ± 0.05 mil
 Hardness: (ASTM D-3363, NCCA 11-12, Eagle Turquoise Pencils) HB Minimum
 Adhesion (X-Cut): (ASTM D-3359) No adhesion loss
 Adhesion (Crosshatch): (ASTM D-3359) No adhesion loss
 Abrasion Coefficient: (ASTM D-968) 100 liters/mil topcoat
 Direct Impact Flexibility: (ASTM D-2794, Gardner Impact Tester, 1/10" Distortion) Excellent, no removal
 Reverse Impact Flexibility: (NCCA Spec. 11, ASTM D-2794, Gardner Impact Tester, 5/8" ball Impact force in inch pounds equal to metal thickness) Excellent, no cracking or loss of adhesion
 Formability: (ASTM D-4145, 180° T-Bend on 1/8 Mandrel) No cracks or loss of adhesion
 Erosion: (20 years, 45° South Florida) Maximum 15% loss
 Humidity Resistance: (ASTM D-2247) Passes 2000 hours on Galvalume® and 4000 hours on Aluminum
 Acid Resistance: (ASTM D-1308, Proc. 3.1.1, 10% Sulfuric Acid spot test, 24 hour exposure) Excellent, no effect
 Salt Spray Resistance: (ASTM B-117) Passes 2000 hours on Galvalume® and 4000 hours on Aluminum
 Alkali Resistance: (ASTM D-1308, Proc. 5.2, 10% Sodium Hydroxide, 24 hour exposure) Excellent, no effect
 Detergent Resistance: (ASTM D-2248, 72 hours immersion in 3% solution at 100°F) Excellent, no effect
 Resistance to Acid Pollutants: (ASTM D 1308 Proc. 3.1.1, 24 hour exposure 10% HNO³ vapors) Excellent, no effect
 Weathering - Color Retention: (ASTM D-2244, 20 years, 45° South Florida) Maximum 5 NBS units color change
 Weathering - Chalk Resistance: (ASTM D-4214, 20 years, 45° South Florida) Not worse than No. 8 rating

Notes:

1. ASTM - American Society for Testing Materials
2. NCCA - National Coil Coaters Association
3. Galvalume® is 55% Aluminum-Zinc alloy coated sheet steel and is a registered trademark of BIEC International Inc.

S Stock Color; Not subject to a minimum order

N Non-Stock Color; Subject to inventory on hand; 4,500 sf minimum order for 22 Gauge and 0.032 & 0.040 Aluminum

N/A Not Available

* Consult BMC on product availability for 22 Gauge and 0.032 and 0.040 Aluminum. Premium and Metallic colors are subject to a surcharge, contact BMC for additional information

BMC SAN ANTONIO
 6515 Fratt Rd.
 San Antonio, TX 78218
 (210) 650-3050
 Fax (210) 650-0379

BMC HOUSTON
 1720 Maury St.
 Houston, TX 77026
 (713) 223-4971
 Fax (713) 236-9422

BMC DALLAS
 2015 California Crossing
 Dallas, TX 75220
 (972) 506-8496
 Fax (972) 506-8478

BMC DENVER
 7505 E. 41st Ave.
 Denver, CO 80216
 (303) 322-3703
 Fax (303) 322-3810

BMC CHICAGO
 1175 Carolina Dr.
 W. Chicago, IL 60185
 (630) 231-7495
 Fax (630) 231-7520

BERRIDGE FLORIDA SALES CORPORATION**
 8802 Venture Cove
 Tampa, FL 33637
 (813) 335-4505
 Fax (210) 650-0379

BMC PHOENIX
 5717 W. Washington St.
 Phoenix, AZ 85043
 (602) 385-1237
 Fax (210) 650-0379

BMC ATLANTA
 319 Lee Industrial Blvd.
 Austell, GA 30168
 (770) 941-5141
 Fax (770) 941-7344

BMC OKLAHOMA CITY
 1400 Exchange Ave.
 Oklahoma City, OK 73108
 (405) 248-7404
 Fax (210) 650-0379

BMC KANSAS CITY
 1235 Southwest Blvd.
 Kansas City, KS 66103
 (913) 227-0855
 Fax (210) 650-0379

BERRIDGE CALIFORNIA SALES CORPORATION**
 8442 Sultana Ave.
 Fontana, CA 92335
 (562) 402-2081
 Fax (562) 865-7878

** Berridge California and Florida Sales Corporations are separate entities from Berridge Manufacturing Company



CORPORATE & SALES HEADQUARTERS
 2610 Harry Wurzbach Road
 San Antonio, TX 78209
 (210) 650-3050
 Fax (210) 650-0379

MANUFACTURING FACILITY
 2201 Rudeloff Road
 Seguin, TX 78155
 (830) 401-5200
 Fax (830) 303-0530

WWW.BERRIDGE.COM

© Berridge Manufacturing Company 2020